








# STAGE DECK SURFACE OPTIONS



## Carpet

Carpet options subject to change.

Colors are representative only.

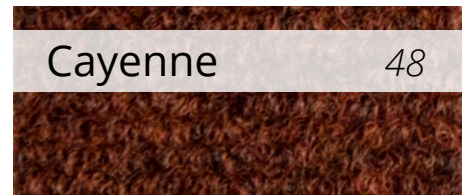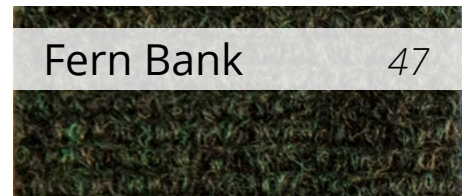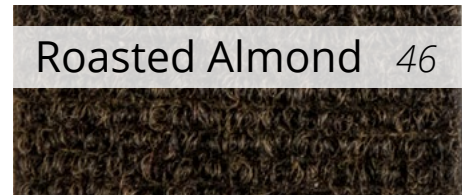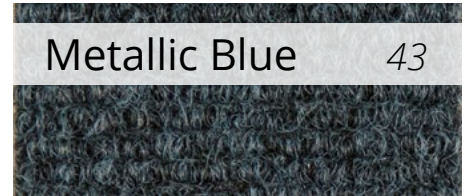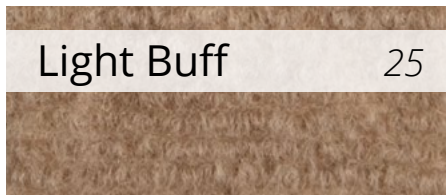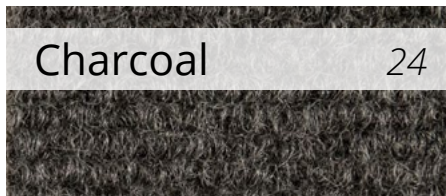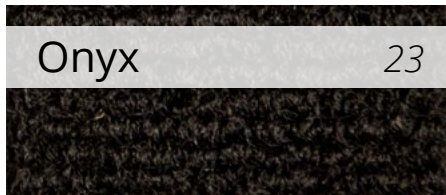


## Hard Surface

Surface options subject to change.

Colors are representative only.

*(Not available on Harmony Choral Risers or ADA stage ramps)*

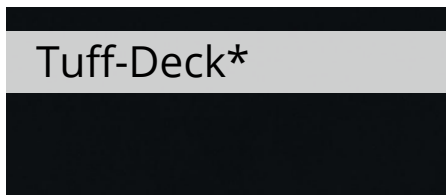

\* Not Available on TechLite™



# SPECIFICATIONS

## *For Durable Tuff-Cord Indoor/Outdoor Needlebond Carpet*

	<b>Tuff-Cord I</b>	<b>Tuff-Cord II</b>	<b>Tuff-Cord III</b>	<b>Tuff-Cord IV</b>
<b>Colors</b>	Cloud Gray, Onyx, Charcoal, Light Buff	Roasted Almond, Fern Bank, Metallic Blue	Brick	Cayenne
<b>Fiber Type</b>	100% Solution Dyed Olefin	Blend of 60% Polyester/ 40% Solution Dyed Olefin	100% Solution Dyed Olefin	100% Solution Dyed Olefin
<b>Fiber Features</b>	Color is added to olefin fibers while in liquid form allowing the color to go completely through the fiber. Olefin is hydrophobic, absorbing very little moisture. Harsh chemicals including bleach have no effect on olefin fiber colors. Olefin is static resistant.	Color is added to olefin fibers while in liquid form allowing the color to go completely through the fiber. Olefin is hydrophobic, absorbing very little moisture. Harsh chemicals including bleach have no effect on olefin fiber colors. Polyester/ Olefin blend is static resistant.	Color is added to olefin fibers while in liquid form allowing the color to go completely through the fiber. Olefin is hydrophobic, absorbing very little moisture. Harsh chemicals including bleach have no effect on olefin fiber colors. Olefin is static resistant.	Color is added to olefin fibers while in liquid form allowing the color to go completely through the fiber. Olefin is hydrophobic, absorbing very little moisture. Harsh chemicals including bleach have no effect on olefin fiber colors. Olefin is static resistant.
<b>Warranty</b>	1-Year Fade	1-Year Fade	1-Year Fade	1-Year Fade
<b>Backing</b>	Unitary	Unitary	Unitary	Unitary
<b>Total Weight</b>	17 oz. / sq. yd.	17 oz. / sq. yd.	13 oz. / sq. yd.	28 oz. / sq. yd.
<b>Pill test (CPSC FF1)</b>	Passes	Passes	Passes	Passes
<b>Flooring Radiant Panel Test</b>	(ASTM E648) 0.56 w/cm2 Class 1	(ASTM E648) Class 1	Not Tested	(ASTM E648) Class 1

Cloud Gray, Onyx, and Charcoal are stock colors. Allow 30 to 45 days for delivery. Other colors are special order. Please allow a minimum of 45 days for delivery. All colors are the same price.