

Venue Maker Pro™ Stage*



A Perfect Fit.
Built to Last.



* Patent Pending

SICO® EXCLUSIVES

The new Venue Maker Pro™ (VMP) Stage* is in a class of its own. With its patent pending design, top leveling system, unique guardrail attachment and v-shaped frame for easy access under the stage, the VMP is ready to take on your venue's next performance with ease.



Compact Storage

The smallest storage footprint of any stage in its class. Roll or forklift into and out of use.



Intuitive Design

All decks, frames, and pin connectors are the same and require no instruction to operate.



Top Deck Leveling

Reduce leveling and set-up time. Fine tune the level plane from above the deck surface.

Performance Stage Features

Reversible Decks

Top Leveling (Optional)

4-Way Bridging

Step-Through Design

Adjustable Leg (2" Increments)
(Single Height Options Available on Low-Height Frames)

Transport Lock


Frame Lock

4'x8'; 8'x8'; 12'x8' Frame Sizes
(1.2m x 2.4m; 2.4m x 2.4m; 3.6m x 2.4m)

Compact Folding Frame

Frame Leveling

Caster Lift Mechanism

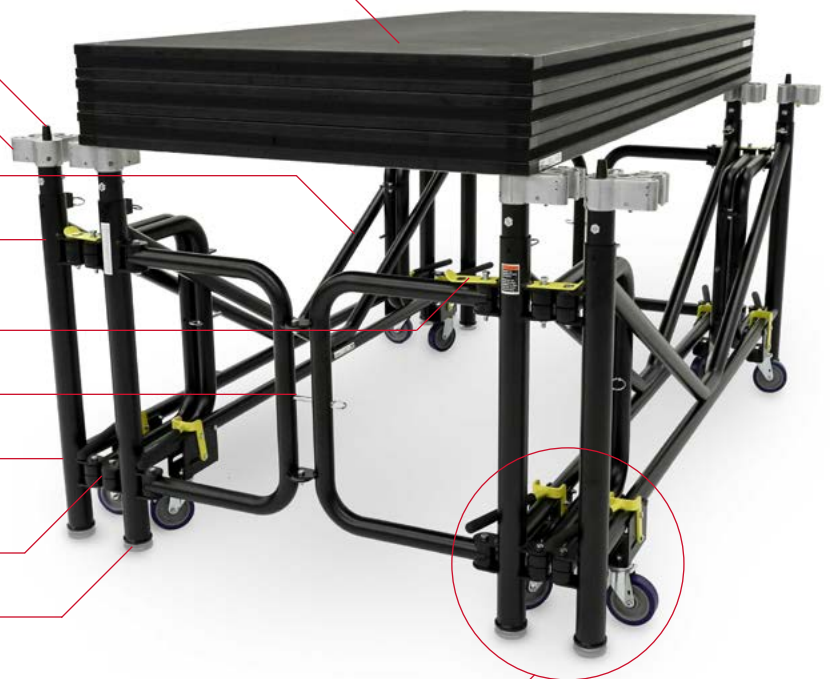

* Patent Pending

Frame

Frame Locks: Frames lock in open and closed position for use and transport.

Commercial Grade Steel:

High-quality steel ensures longevity of the stage's rigidity and durability of the welds for the lifetime of the stage.

Step-Through Design: V-shape frame allows for storage and easy access underneath the stage deck while in use.

Black Powder Coat Finish:

Creates a dense finish which is more durable and longer lasting than conventional paint.

Telescoping Leg: Adjust up or down using 2" (5cm) increments. Easily lock into place using spring loaded pins.

Adjustable Glide:

Glide extends up to 5" (13cm). Coarse adjustment saves time leveling stage frame.

Transport & Storage

Caster Lift Mechanism:

Casters easily raise for use and lower for transport.

5" Non-Marring Caster:

Smooth rolling and durable casters make moving entire stage unit with one person easy.

Forklift Friendly: 60" (152cm) of forklift area between caster lift mechanisms.

Stacking Tray Option: Stack 3 frames on top of one another to utilize vertical storage space.

Low-Height Frame Caddy: Store up to 12 low-height frames with pin connectors on a single caddy.

FEATURES & BENEFITS

Pin Connector

Top Leveling: *(Available)* Fine tune the level plane from above the deck surface. Greatly reduce set-up and leveling time.

Non-Top Leveling: Pin connectors do not fine tune the level plane from the deck surface.

4-Way Bridging: Bridge decks in any direction to lower the number of frames needed.

Pivot Pins: Easily turn and lock pin connector to desired position without loose parts.

Stores on Leg: Pin connectors store attached to the stage legs to simplify storage and prevent loss of parts.

Load Ratings

Uniformly Distributed Load: 125 psf (6 kN/m²).

Sway Load: 5% of uniformly distributed load.

Point Load: 200 lbs (90 kg) on a 4"x4" (10x10cm) area.

Limited Warranty

Protected by a 3-year warranty against manufacturer's defects. Lifetime warranty on welds. Visit www.sicoinc.com for all warranty details.

Serial Number: Attached to both deck and frame for easy identification.

Stage Deck

Reversible Deck Surface*:

Choose a surface material for each side of the deck for versatility and longevity.

Multi-Layer Construction:

A cellular honeycomb core is bonded between two 3/8" (.95cm) plywood substrates which is lightweight, strong and very quiet.

Corner Holes: Easily line up the pin connectors to the deck for quick set-up time.

Reinforced Corner: Reinforced with solid wood blocks in addition to external protective ABS plastic providing protection from drops.

Deck Edges: Protective impact-resistant ABS plastic edging is bonded to the core.

Hook & Loop Drapery Fasteners:

Continuous hook fastener banding placed around the perimeter edges of the deck allows for quick and easy attachment of skirting without any clips or pins.

Space Design


Take advantage of our FREE space design service to determine the optimal layout and number of products for your space.

**Carpet on both sides of deck is not available.*

OPTIONS

Choose Frame Size


Choose from 4'x8'* , 8'x8' and 12'x8' frames. This creates versatility in the staging configuration. A 12'x8' frame has the smallest storage footprint for it's size.

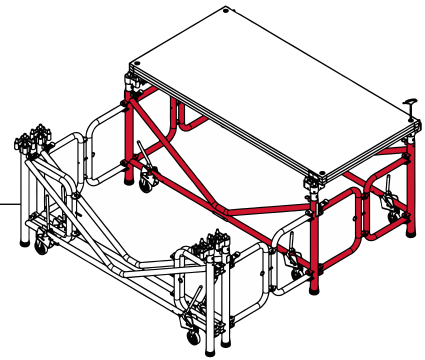

Choose Leveling Adjustability

Choose the top leveling option to save set-up time and staff. Simply and easily level the deck from above the deck surface.

Choose the non top leveling option for the basic set up without top deck leveling.

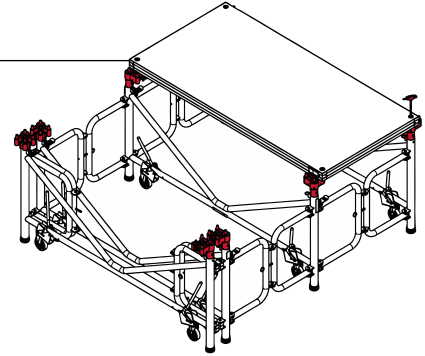

Choose Deck Surfaces*

Carpet




Hard Surface (Not available on ADA stage ramps)



All colors are representative only

*Carpet on both sides of deck is not available

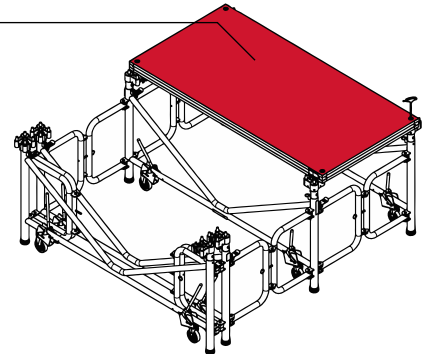

Choose Accessories


Description	Model No.
Guardrail	SGP11??B
Guardrail Storage Caddy	1412-001B
Deck Caddy	SAC11VD??B
Low-Height Frame Caddy- Small	SAC11VE??B
Low-Height Frame Caddy- Large	SAC11VF??B
Deck Storage Pallet	SAC11VP
Stacking Tray	286085/286089
Modular Steps	SAS21?????
Articulating Steps	SAS21???

Description	Model No.
Unit to Unit Connector	286095
Deck	SVP44??????
Ramp	SAR31?????
Backdrop	SBVM11?Z
Drapes	SDVM-1?????
Drape Caddy	1404-00?B
Chair & Table Stop	SAX11CS?
Sway Brace	286110

? = Customization Option

* Low-Height Frame Only Available in 4'x8' Size

Bridging

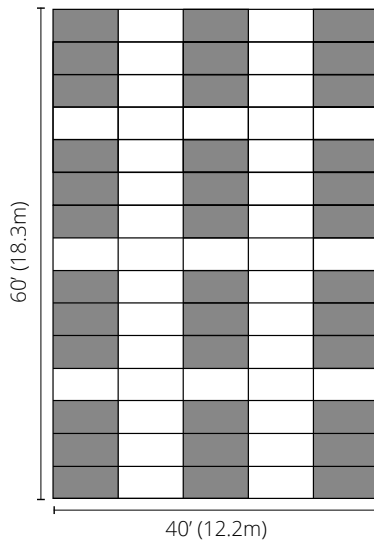

Bridged Deck
 Deck Over Frame

75- Total Decks
 39- Bridged Decks
 36- Decks on Frames
 12- Frame Units

Standard Bridging



Unit-to-Unit Bridging




Utilize deck bridging to increase your ROI. Save on set-up time, cost, storage, and weight. Over half the stage decks do not need frames for support (depending on configuration).

Have plenty of open access below stage for storage, cords, or personnel.

**All size frames allow for bridging. Actual configuration may vary.*

Sizes

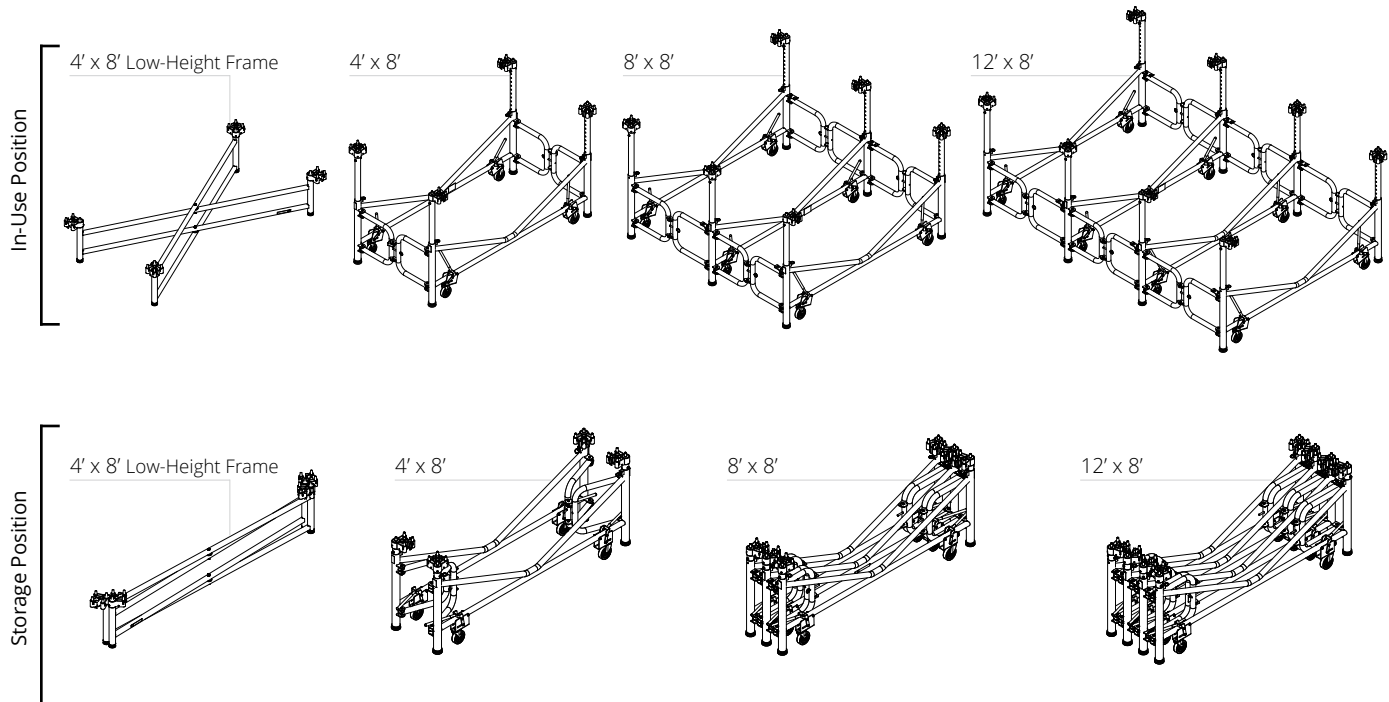

SPECIFICATIONS

Size	Description	Height	Weight	Model No.
4' x 8' (1.2mx2.4m)	Non-Bridging	8" (20cm)	12 lbs. (5.5kg)	SPS11PB2
		12" (30cm)	38 lbs. (17kg)	SPS11NB2
	Top Leveling	32"-48" (81-122cm)	220 lbs. (100kg)	SPS111CB1
		40"-60" (102-152cm)	247 lbs. (112kg)	SPS111BB1
		48"-78" (122-198cm)	270 lbs. (122kg)	SPS111AB1
	Non-Top Leveling	12" (30cm)	52 lbs. (24kg)	SPS11MB2
		16" (41cm)	64 lbs. (29kg)	SPS11LB2
		18" (46cm)	69 lbs. (31kg)	SPS11KB2
		24" (61cm)	95 lbs. (43kg)	SPS11JB2
		30" (76cm)	102 lbs. (46kg)	SPS11HB2
		32" (81cm)	104 lbs. (47kg)	SPS11GB2
		18" & 24" (46 & 61cm)	106 lbs. (48kg)	SPS11FB2
		24" & 32" (61 & 81cm)	112 lbs. (51kg)	SPS11EB2
		24", 30" & 36" (61, 76 & 91cm)	113 lbs. (51.5kg)	SPS11DB2
		32"-48" (81-122cm)	220 lbs. (100kg)	SPS111CB2
		40"-60" (102-152cm)	247 lbs. (112kg)	SPS111BB2
		48"-78" (122-198cm)	270 lbs. (122kg)	SPS111AB2
8' x 8' (2.4m x 2.4m)	Top Leveling	32"-48" (81-122cm)	346 lbs. (157kg)	SPS112CB1
		40"-60" (102-152cm)	394 lbs. (179kg)	SPS112BB1
		48"-78" (122-198cm)	434 lbs. (197kg)	SPS112AB1
	Non-Top Leveling	32"-48" (81-122cm)	346 lbs. (157kg)	SPS112CB2
		40"-60" (102-152cm)	394 lbs. (179kg)	SPS112BB2
		48"-78" (122-198cm)	434 lbs. (197kg)	SPS112AB2
12' x 8' (3.6m x 2.4m)	Top Leveling	32"-48" (81-122cm)	478 lbs. (217kg)	SPS113CB1
		40"-60" (102-152cm)	533 lbs. (242kg)	SPS113BB1
		48"-78" (122-198cm)	581 lbs. (264kg)	SPS113AB1
	Non-Top Leveling	32"-48" (81-122cm)	478 lbs. (217kg)	SPS113CB2
		40"-60" (102-152cm)	533 lbs. (242kg)	SPS113BB2
		48"-78" (122-198cm)	581 lbs. (264kg)	SPS113AB2
4' x 8' (1.2mx2.4m)	Stage Deck	3.25" (8.3cm)	122 lbs. (55kg)	SVP44?????
(see next page)	Deck Caddy	65.5" (166cm)	125 lbs. (57kg)	SAC11VD??B
(see next page)	Small Caddy*	70.5" (179cm)	134 lbs. (61kg)	SAC11VE??B
(see next page)	Large Caddy*	75.5" (192cm)	210 lbs. (95kg)	SAC11VF??B

? = Customization Option

* For Low-Height Frame Option Only

Storage Options & Dimensions

STORAGE

Size	Height	Dimensions*: Active Storage (L x W x H)	Dimensions: Without Decks (L x W x H)
4' x 8' (1.2m x 2.4m)	32"-48" (81-122cm)	48"x98"x39.5" (122x249x100cm)	23"x98"x31.5" (58x249x80cm)
	40"-60" (102-152cm)	48"x98"x47.5" (122x249x120cm)	23"x98"x39.5" (58x249x100cm)
	48"-78" (122-198cm)	48"x98"x55.5" (122x249x141cm)	23"x98"x47.5" (58x249x120cm)
8' x 8' (2.4m x 2.4m)	32"-48" (81-122cm)	55"x98"x39.5" (140x249x100cm)	19"x98"x31.5" (48x249x80cm)
	40"-60" (102-152cm)	55"x98"x47.5" (140x249x120cm)	19"x98"x39.5" (48x249x100cm)
	48"-78" (122-198cm)	55"x98"x55.5" (140x249x141cm)	19"x98"x47.5" (48x249x120cm)
12' x 8' (3.6m x 2.4m)	32"-48" (81-122cm)	63"x98"x39.5" (160x249x100cm)	27"x98"x31.5" (69x249x80cm)
	40"-60" (102-152cm)	63"x98"x47.5" (160x249x120cm)	27"x98"x39.5" (69x249x100cm)
	48"-78" (122-198cm)	63"x98"x55.5" (160x249x141cm)	27"x98"x47.5" (69x249x120cm)



Deck Pallet: Store the decks on a separate pallet to roll or forklift into storage.


(15 decks max. per pallet)



Active Storage:

The decks can be stored and transported directly on the frame itself.


* 3 decks stacked on frame.

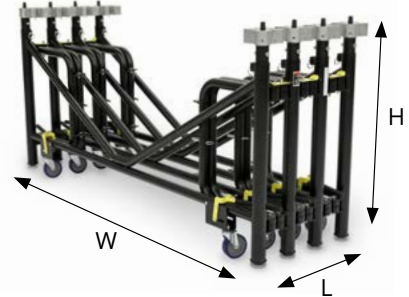

Smallest Storage Footprint in Its Class:

Save even more space by stacking frames on top of each other 3 high using stacking trays. Stacks are 27"L (69cm) regardless of frame size.

Stacking Trays:




Low-Height Frames

Storage & Transport Caddies:

The low height frame storage caddy can store up to 12 frames on the large model and 6 frames on the small model (including all pin connectors).


Deck Caddy (L x W x H)

35" x 100" x 65.5"
(89 x 254 x 166cm)





Small Caddy* (L x W x H)

34.5" x 92.5" x 70.5"
(88 x 235 x 179cm)



Large Caddy* (L x W x H)

60" x 113" x 75.5"
(152 x 287 x 192cm)

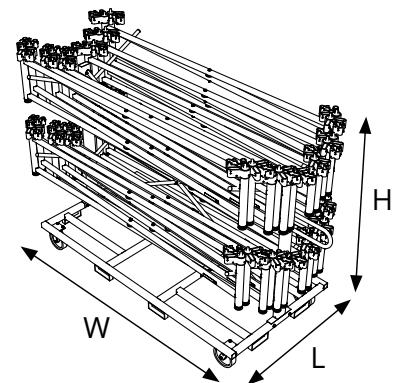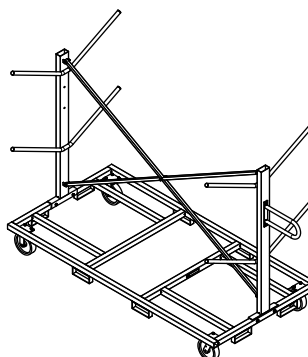

* For Low-Height Frame Option Only

WANT TO FIND OUT MORE?

Visit www.sicoinc.com to see more of our wide variety of innovative products.




©SICO Incorporated
VMP IS - 6/22 - R5 IPG 2K

SICO Incorporated -
Global Headquarters
SICO America Inc.
Tel: 1 800 328 6138
Email: sales@sicoinc.com

SICO Japan Inc.
Tel: +81(3) 3288 0145
Email: info@sico-japan.com

SICO Asia PTE LTD
Tel: (65) 6500 0800
Email: sales@sicoasia.com

SICO Middle East DMCC
Tel: (971) 4 422 8259
Email: sales@sico-me.com

SICO Europe Limited
Tel: +44(0) 1303 234 000
Email: sales@sico-europe.com

SICO South Pacific Limited
Tel: +61(2) 4336 1333
Email: sales@sicosp.com.au